# logitech®



# DATA SHEET ROOM SOLUTION: MEETUP + ROOMMATE + TAP IP

Deploy a complete video conferencing solution for huddle rooms and small spaces with Logitech MeetUp, Tap IP touch controller, RoomMate, and Compute Mount.

Set up your room for leading video conferencing platforms, including Zoom Rooms, RingCentral, Microsoft Teams on Android, and others<sup>\*</sup>.


Use Logitech Sync to monitor and manage your room solutions and get business insights into how rooms are being used.

## ALL-IN-ONE APPLIANCE SOLUTION FOR SMALL MEETING SPACES AND HUDDLE ROOMS

MeetUp is an all-in-one conference camera with an ultra-wide PTZ lens and built-in speakers optimized for small rooms. With Tap IP, employees can join a meeting with just one touch.

Adding RoomMate turns any space into an appliance-based video conference room, eliminating the need for an additional compute device. With its compact form factor, RoomMate can be mounted out of sight and out of harm's way.

# **PRODUCT FEATURES**

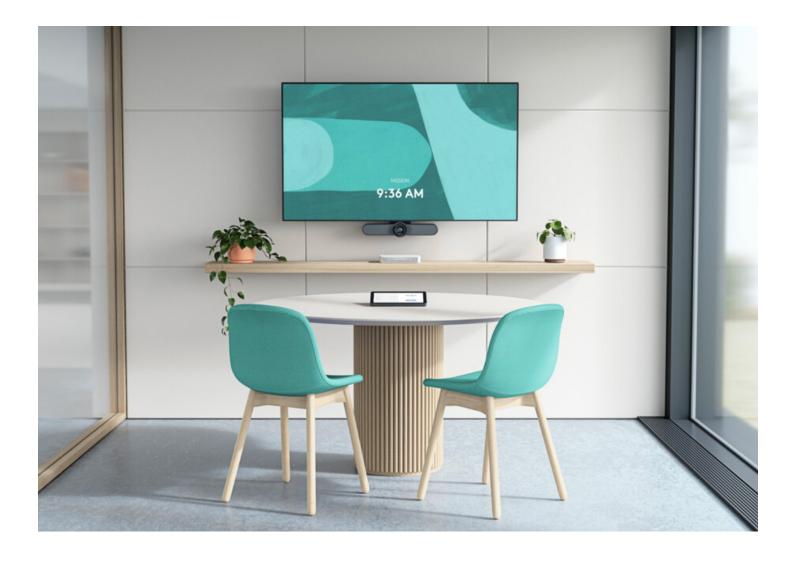

## **BUILT FOR SMALL SPACES**

MeetUp is an all-in-one conference camera with an ultra-wide PTZ lens and built-in speakers optimized for huddle rooms and other small spaces.

## CLEAN AND SECURE MOUNTING

Attach RoomMate anywhere in your meeting space using Compute Mount with cable retention and a hideaway design for a tidy installation.

## **QUICKSTART MEETINGS**

Begin every meeting with one touch with Tap IP, a network-connected meeting controller that's easy to use and simple to set up.

## VIDEO CONFERENCING APPLIANCE

RoomMate turns any space into an appliance-based video conferencing room.

# MANAGEMENT AND INSIGHTS

Monitor, manage, and get business insights into how your rooms are being used with Sync.



## **RECOMMENDED ACCESSORIES**



Tap Riser Mount Elevated table mount with swivel and cable management




Tap Scheduler Purpose-built scheduling panel for meeting rooms



**Expansion Mic for MeetUp** Add-on microphone with mute control for extended audio range

## **TECH SPECS**



Built-in Components: Ultra-HD camera with motorized pan/tilt, integrated microphone with 3 beamforming elements, full-range speaker, integrated table stand/wall mount

Enclosure: All-in-one enclosure with patented anti-vibration suspension system

Remote: RF remote control with three camera presets

Security: Kensington security slot

USB 2.0 cable: 5m (16 ft) included; customersupplied USB 3.0 cable required for 4K video

Dimensions (H x W x D):104 mm (4.09 in) x 400 mm (15.75 in) x 85 mm (3.27 in) Weight: 1.04 kg (2.3 lbs)



Tap Wall Mount Space-saving wall mount with cable management



Tap Table MountSwiveling table mount with cable management



### Scribe

Effortlessly share whiteboards into video meetings with Logitech Scribe, an Al-powered whiteboard camera



Swytch

Connect a laptop to a room system's AV equipment for use with any video meeting or webinar.



MeetUp Mic Extension Cable 10 meter (32.8 ft) extension cable for Expansion Mic for MeetUp



TV Mount for MeetUp (standard & extra large) Mounting option for MeetUp ConferenceCam

## **MEETUP - CAMERA**

Lens: Custom Logitech lens with motorized pan/ tilt

Zoom: 5x digital zoom

Pan: +/- 25°

Tilt: +/- 15°

Field of View: Diagonal: 120°, Horizontal: 113°, Vertical: 80.7°

Total Room Coverage: 163° wide x 110° tall (field of view + pan and tilt)

4K Ultra HD: Up to 3840 x 2160 pixels (  $\bigcirc$  30 fps with customer-supplied USB 3.0 cable

Full HD: Up to 1920 x 1080 pixels @ 30 fps

HD: Up to 1280 x 720 pixels @ 30 fps

RightLight Technologies: Low-light compensation, video noise reduction, low-light saturation optimization

### **MEETUP - SPEAKER**

Volume: 95 dB SPL at 1/2 meter peak Sensitivity: 86.5+/-3dB SPL at 1/2 meter Distortion: 200-300Hz < 3%, 3000 Hz -10KHz < 1%

### **MEETUP - MICROPHONE**

Beamforming Elements: 3

Pickup Range: 4 m (13.1 ft) Sensitivity: -27 dB

Frequency Response: 90Hz-16KHz

RightSound Technologies: AEC (Acoustic Echo Cancellation), VAD (Voice Activity Detector)

Noise Suppression: Al filter

Date Rate: 32KHz sampling rate

Add-on Mics: Supports 1 Expansion Mic for MeetUp to expand audio coverage (not included)

#### TAP IP

Touch Screen: 257 mm (10.1 in) diagonal screen with 14° display angle Resolution: 1280 x 800 Cabling: Power over Ethernet (PoE) cable (not included), IEEE 802.3af Type 1, Class 3 device Cable Management: Internal cable retention and strain relief system Ethernet: 10/100mbps Wi-Fi: 802.11a/b/g/n/ac Device Management: Logitech Sync Color: Graphite Mounting: 100 mm x 100 mm VESA FDMI

Dimensions (H x W x D): 58 mm (2.3 in) x 244 mm (9.6 in) x 179 mm (7.0 in)

### COMPUTE MOUNT

Fits Logitech RoomMate and other compute devices with 100x100 or 75x75 VESA pattern Dimensions: (H x W x D): 35 mm (1.38 in) x 164 mm (6.46 in) x 350 mm (13.78 in)

### **KIT COMPONENTS**

Tap IP

controller

screws (4)

Logitech MeetUp Logitech RoomMate Logitech Tap IP Compute Mount

MeetUp ConferenceCam

USB cable: 16 ft (5 m)

MeetUp

Remote control

Power supply

hardware

Wall mount and

Documentation

Q-SYS Core 8 Flex, Shure IntelliMix P300. For latest information on compatible products, contact your preferred partner. Network Protocol Support: IPv4, IPv6 Proxy Support: IP based Proxy, FQDN based Proxy, Proxy using PAC file Interfaces

HDMI Out: 2 HDMI In 1 USB: 3x Type A Network: 10/100/1G Ethernet WiFi: 802.11a/b/g/n/ac Operating Voltage/Power: 100-240V, 19V, 4.74A Full Disk Encryption: AES-128 Data Encryption: Symmetric Keys, PKI Device Identity: Protected by device attestation Device Access: Authenticated using API Key Protection: Arm TrustZone, RPMP Device Security: Kensington Lock Color: White Dimensions: (H x W x D): 34.5 mm (1.36 in) x 161

ROOMMATE

Operating System: Logitech CollabOS 1.4 or higher

Camera, Rally System, Rally Plus System, Tap, Tap IP

Verified Hardware: Biamp TesiraFORTÉ X 400, QSC

Device Management: Logitech Sync and

supported device management platforms

Certified Hardware: Logitech MeetUp, Rally

mm (6.34 in) x 211 mm (8.31 in)

#### PACKAGE CONTENTS

RoomMate Tap IP touch Logitech RoomMate Power supply VESA mounting AC cable VESA bracket Microfiber Cloth Remote control Documentation Documentation

#### **Compute Mount**

Compute Mount with Cable Retention Clamp Mounting Hardware Documentation

#### WARRANTY

Standard: 2-year limited hardware warranty included

Extended: 1-year and 3-year extended warranties available at the time of hardware purchase. Contact your reseller for availability.

#### \*CERTIFICATIONS & COMPATIBILITY

#### **Appliance Mode**

Supports compatible video conferencing software including Zoom Rooms, Microsoft Teams on Android, and RingCentral Meetings Rooms. Contact Logitech or see https://prosupport.logi.com/hc/en-us/ articles/1500001344641 for availability information and additional video conferencing platforms.

#### Certifications

All components included in the room solution bundle are certified for Zoom Rooms, Microsoft Teams on Android, and RingCentral Meetings Rooms (and Tencent for the Chinaonly version). Contact the manufacturer for additional information on pending and granted certifications.

#### PART NUMBERS

US/CA/MX: 991-000408 Brazil: 991-000409 Argentina/Chile: 991-000410 EU: 991-000411 SEA/Indonesia/KOR: 991-000433 UK: 991-000412 SEA/Hong Kong: 991-000434 Switzerland: 991-000413 AUS/NZ: 991-000414 Taiwan: 991-000415 India: 991-000416 China: 991-000417 Japan: 991-000418

logitech

Contact your reseller or contact us at www.logitech.com/vcsales Logitech Americas 7700 Gateway Blvd. Newark, CA 94560 USA

Logitech Europe S.A. EPFL - Quartier de l'Innovation Daniel Borel Innovation Center CH - 1015 Lausanne

Logitech Asia Pacific Ltd. Tel : 852-2821-5900 Fax: 852-2520-2230

© 2022 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2022